

NARROW FRAMED SLIDING DOOR

PSA PROFILE SYSTEM



The delicately designed Gilgen PSA profile system protects the glass while providing an impressively slim profile and a high level of robustness.

- Single-leaf and bi-parting sliding doors
- Two- and four-leaf telescopic sliding doors
- With side panel, protection leaf
- Emergency-exit function (redundant configuration)
- Standard locking-system built into drive mechanism
- With floor lock
- Full-length bottom rail or fixed point guide
- Can be attached to the door lintel or wall
- Vertical door leaf interlocking
- TÜV approved and complies with the pertinent standards and requirements (e.g. EN 16005, DIN 18650)


Range of application

SL 35 sliding door	Clear width	Clear height	max. door leaf weight
Single-leaf	700 - 1300 mm (redundant 950 - 1300mm)	up to 2500 mm	100 kg
Bi-parting	800 - 2500 mm (redundant 900 - 2500mm)	up to 2500 mm	2 x 100 kg
Two-leaf telescopic	1100 - 3000 mm (redundant 1100 - 3000mm)	up to 2500 mm	2 x 100 kg
Four-leaf telescopic	1200 - 4000 mm (redundant 1200 - 3000mm)	up to 2500 mm	4 x 75 kg




Possible applications


Bi-parting installation with side panels

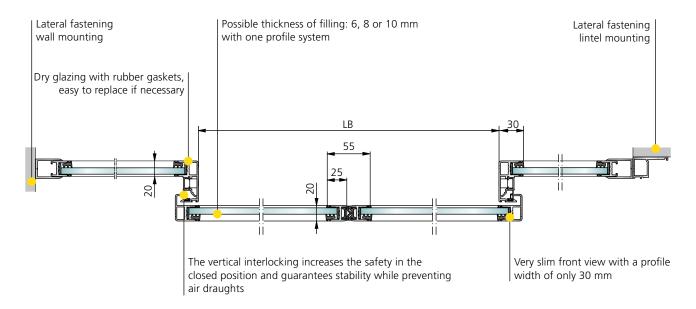

Single door leaf installation with side panel





Four-leaf telescopic installation with side panels

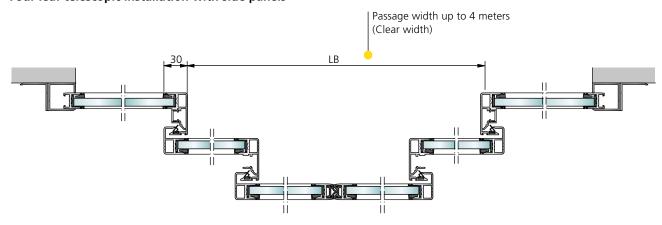






Header height of 100 mm and 140 mm














Bottom guide rails









Dansk leverandør:

Swissdoor ApS

Stenhuggervej 2 5471 Søndersø Danmark Telefon +45 86 28 00 00 mail@swissdoor.dk www.swissdoor.dk

Gilgen Door Systems AG

Freiburgstrasse 34 CH-3150 Schwarzenburg T +41 (0) 31 734 41 11 F +41 (0) 31 734 43 79 info@gilgendoorsystems.com www.gilgendoorsystems.com



All current addresses: www.gilgendoorsystems.com/worldwide