




# T50

Rack actuator - Thrust force 500N - Max stroke 500 mm

Possibility to connect more push points on the same window frame through instantaneous clutch of the transmission rod.



Rapid installation with no feeding due to the easy adjustment of the self-aligning sliding bracket that allows the regulation of the end of stroke along the actuator's side guides every 2 cm.

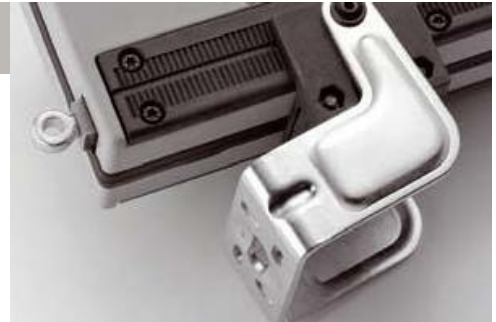

Stroke adjustable in 7 positions: from 150 to 500 mm.





Protection degree of electronic devices IP 55.



Industrial, geometrical and clear-cut design.





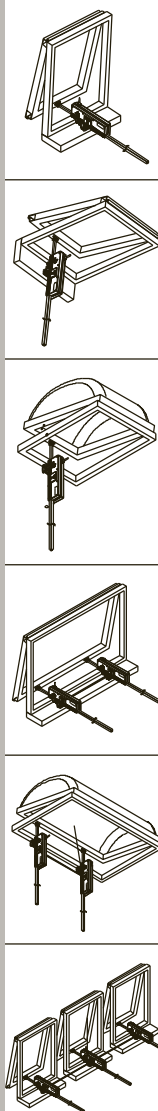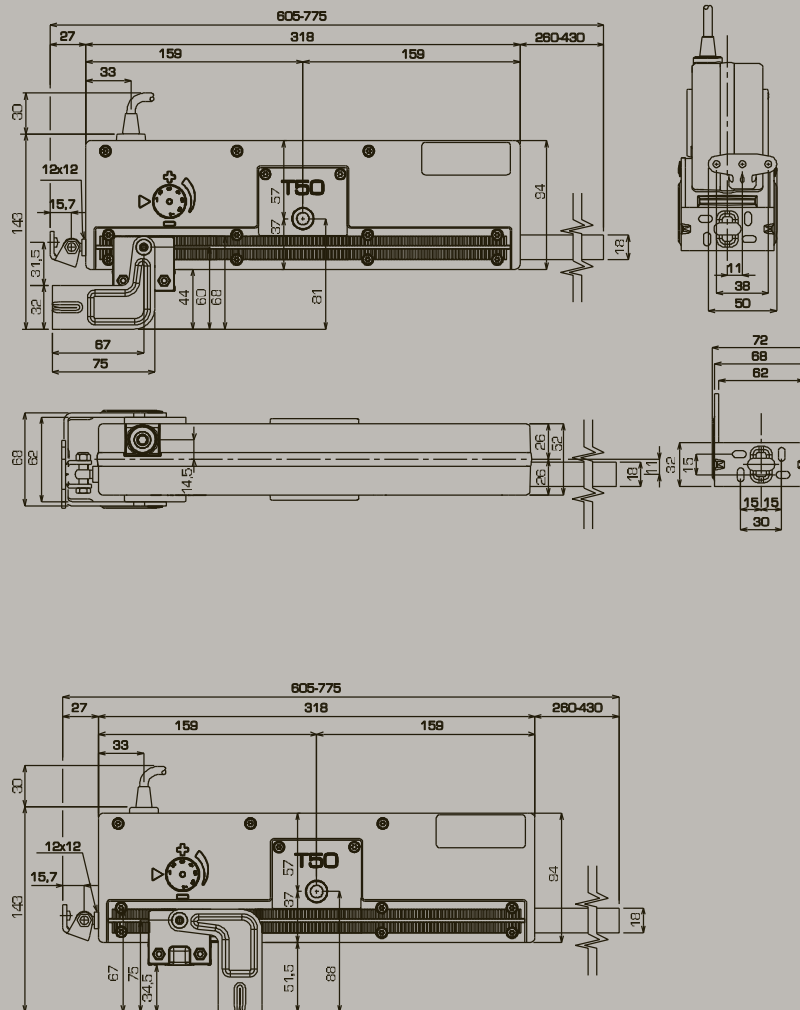

### Description for technical specifications

<p><b>Top rack actuator, model T50, with self-aligning swivel movement,</b> complete with brackets and fitting accessories for top hung windows.</p>
<p><b>Available at 230V~50 Hz or 24V d.c.</b></p>
<p><b>Max. applicable force 500N, max. stroke 500 mm+/- 20 mm.</b></p>
<p><b>Stroke adjustable about every 50 mm by external adjusting selector.</b></p>
<p><b>Preset for the mechanical connection of 2 or more push points.</b></p>
<p><b>CE marked device complying with the following directions: CEE 89/ 336, EEC 73/23</b> and following amendments.</p>



**Danish Seller**

**Swissdoor ApS**  
Stenhuggervej 2  
5471 Soendersoe  
Denmark  
VAT nr.: 32084222  
Tlf. nr.. +45 8628 0000  
mail@swissdoor.dk  
www.swissdoor.dk